


1 SOUTH BUILDING ELEVATION  
1/4" = 1'-0"

KEYNOTE	DESCRIPTION
1A	DRIVE UP CANOPY. REFER TO A5.0 AND A5.1 FOR DETAILS
1B	PARAPET RETURN. REFER TO ROOF PLAN FOR DETAILS
4B	ALL BRICK MASONRY VENEER TO BE TYPE 1 U.N.O.
4C	3-5/8"(W) X 7-1/2"(T) PRE-CAST CONCRETE LINTEL WITH 1/4" X 1/4"
4D	3-5/8"(W) X 7-1/2"(T) PRE-CAST CONCRETE COPING.
4E	STACK BOND AT CORNERS OF PILASTERS. PROVIDE HORIZONTAL REINFORCEMENT.
4F	RECESS SOLDIER BRICKS 1" AT CENTER OF PILASTERS, TYPICAL
4H	VERTICAL MASONRY EXPANSION JOINT
4J	USE TYPE 2 BRICK UNDER WINDOWS. RECESS 2" FROM ADJACENT MASONRY, TYPICAL
4K	NOMINAL 2-1/2"(T) X 8"(W) X 4'-8"(T) PRECAST PANEL. INSET 1" FROM FACE OF BRICK, TYP.
7B	REVEAL IN METAL PANEL SYSTEM
7K	OMEGA-LITE PANELS WITH 1-PIECE TIGHT FIT REVEAL MOLDINGS, OR APPROVED EQUAL
7L	ROUT & RETURN PANEL TO FORM SEAMLESS PARAPET. OVERLAP
7P	PRE-FINISHED ALUMINUM COPING. SLOPE TOWARD ROOF.
8A	2" X 41/2" STORE FRONT SYSTEM W/1" INSULATED GLASS.
8B	2-1/4" X 6" CURTAIN WALL SYSTEM W/1" INSULATED GLAZING
26A	LIGHT FIXTURE, REFER TO ELECTRICAL DRAWINGS

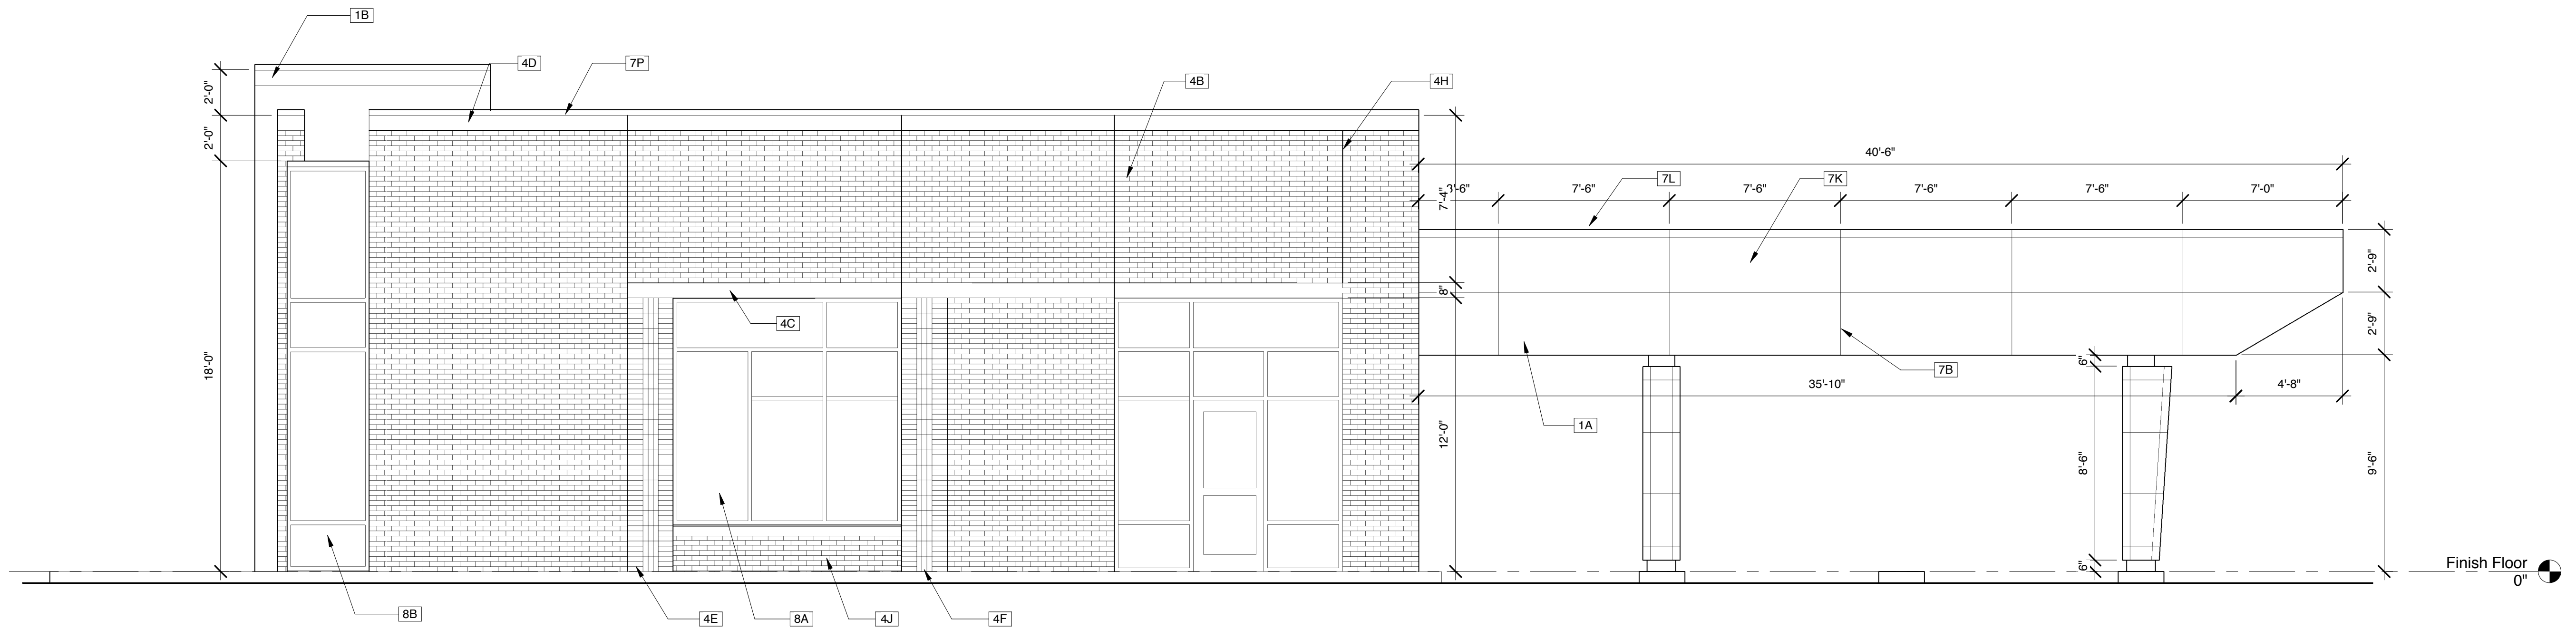

2 EAST BUILDING ELEVATION  
1/4" = 1'-0"